



To install the Universal Seatback Dock on the Headrest:

The Universal Seatback Dock can be installed on either the driver or passenger seat.


1. Adjust the headrest position.



2. Plug one end of the Vehicle DC Power Adapter into the DC 12V Charging Port on the bottom of the Universal Seatback Dock.

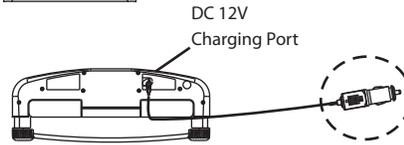

3. Turn Screws (A) counterclockwise and remove the Screws to disassemble the Universal Seatback Dock.

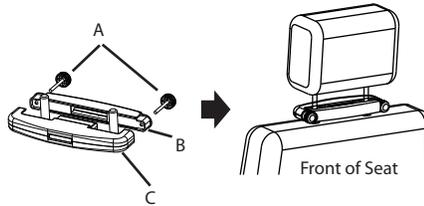

4. Clamp the Front Bracket (B) and Rear Bracket (C) around the headrest posts. Note the location of the bottom side engraved on the Rear Bracket. Ensure that this side is facing down and the slot is facing the rear of the vehicle.

5. Secure the brackets in place with the Screws. Turn the Screws clockwise and hand tighten.

6. Plug the other end of the Vehicle DC Power Adapter into the Vehicle DC Accessory Socket of your car.

To attach the Protective Case to the Universal Seatback Dock:

The Mounting Arm has six depth settings to allow for proper fitting to the seat depending on the size of the headrest.


Warning! Always make sure the Red Switch is in the UNLOCK position when inserting or removing the Mounting Arm, otherwise damage will occur to both units.

1. Hold the Red Switch in the UNLOCK position.
2. While holding the Red Switch in the UNLOCK position, insert the Mounting Arm into the slot in the Rear Bracket.
3. Once the Mounting Arm is inserted into the Rear Bracket sufficiently, release the Red Switch so that it returns to the LOCK position.



Warning! Ensure the Mounting Arm is inserted and locked in the Rear Bracket before moving your vehicle.

4. Adjust the tilt angle to the desired viewing position.

Fully inserted and locked-in position



First locked-in position



To remove the Protective Case from the Universal Seatback Dock:

1. Hold the Red Switch in the UNLOCK position.
2. At the same time, pull the Mounting Arm out of the Rear Bracket.
3. When the Mounting Arm is fully removed from the Rear Bracket, release the Red Switch so that it returns to the LOCK position.