


**Please read this manual thoroughly before installation.**  
This manual shows a typical installation. Your vehicle may vary. Use caution and if unsure seek professional assistance. Dash disassembly is specific to the 2015 Ford F150.

**Warning**  
Before head unit removing, make sure ACC power is off.

Cover all surfaces with tape or plastic protection film to protect against scratching and damage. Advent / Voxx is in no way responsible for any damage incurred during installation. This product has been validated in the vehicles listed on the application guide only. Consult Technical support at 800-323-4815 if you have any questions.




**Components :**


- GPS Antenna
- HDMI
- DVI-I
- Edge T-harnesses
- USB + AUX + USB Ext
- Screws
- Interface Module
- Connection unit
- VHB Tape

**Installation Tools : (NOT INCLUDED)**


- Screw driver components
- Pry Tool
- Towel

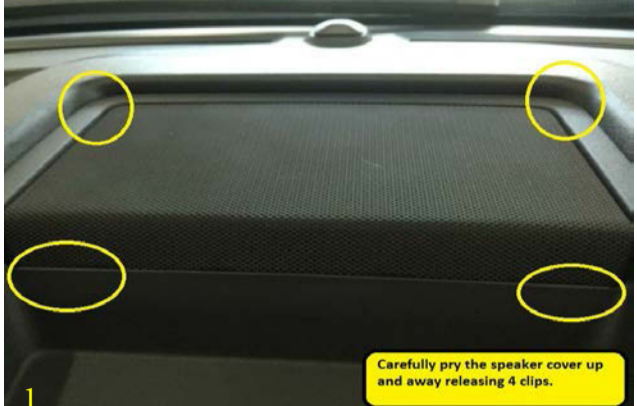


1 Carefully pry the speaker cover up and away releasing 4 clips.

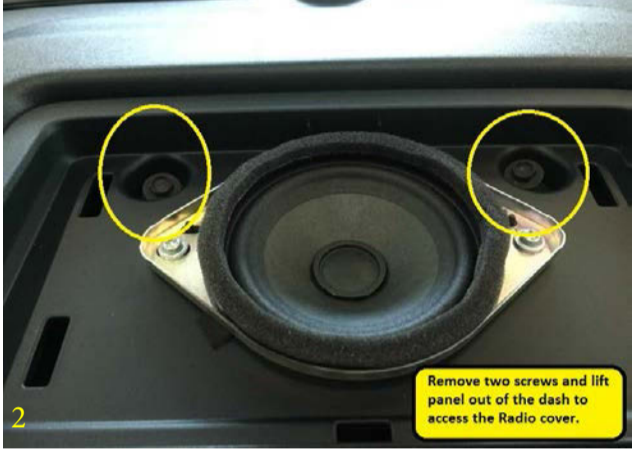


2 Remove two screws and lift panel out of the dash to access the Radio cover.




3 Remove two screws and then carefully pry console forward.

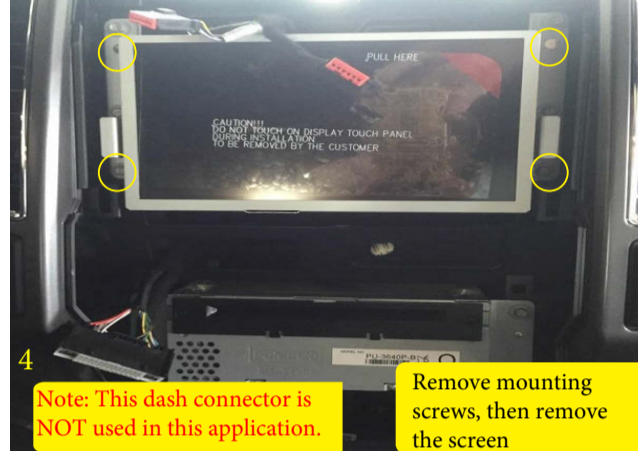


4 Note: This dash connector is NOT used in this application. Remove mounting screws, then remove the screen.

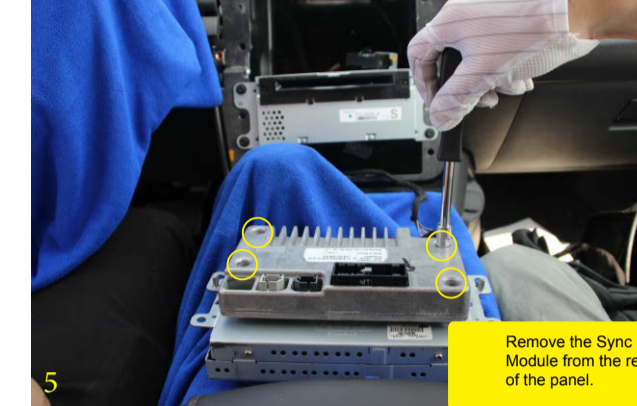


5 Remove the Sync Module from the rear of the panel.

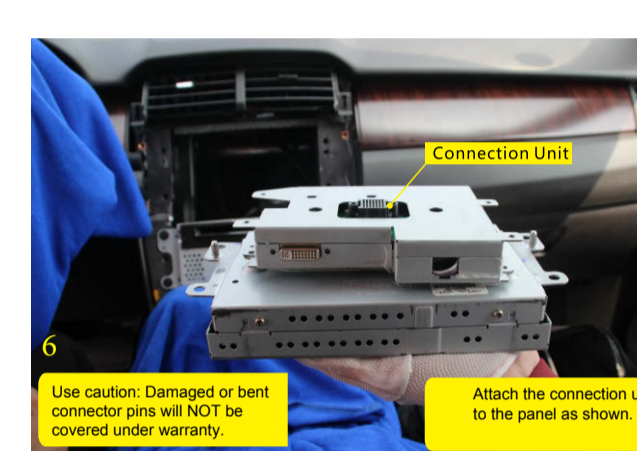


6 Attach the connection unit to the panel as shown.

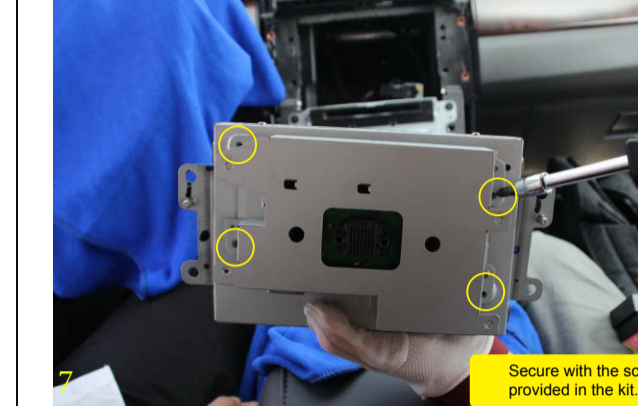


7 Secure with the screws provided in the kit.



8 Attach the Sync Module to the connection unit using the OEM screws.




9 Route the cables behind the radio chassis to the area below the chassis.



10 Route the cables behind the radio chassis to the area below the chassis.

**Wiring diagram**

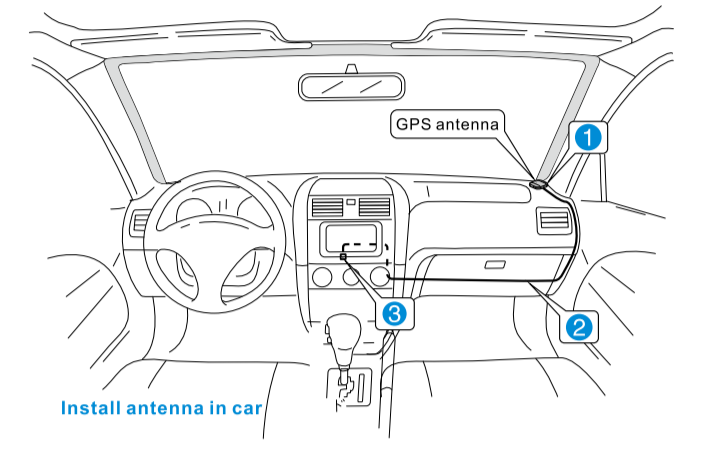

Install antenna in car.

**GPS antenna installation**

1. Find a suitable mounting location. Clean the area with alcohol and use a strong double sided tape to attach the antenna to the dash.
2. Carefully route the antenna cable to the GPS Module. Insure you do not interfere with any airbags or other safety systems in the vehicle. Do not pinch or pull on the antenna cable as this can damage it.

Installation of the GPS antenna inside the vehicle passenger compartment may interfere with reception if you must install it inside the vehicle insure it is not blocked by metal and has a clear view of the sky. If reception is poor try another location.

**Prior to installation:**

Care must be taken when installing this accessory to ensure damage does not occur to the vehicle. The installation of this accessory should follow approved guidelines to ensure a quality installation. Read entire instructions thoroughly before starting.

This document covers such items as:-

- Vehicle Protection (use of covers and blankets, cleaning chemicals, etc.).
- Vehicle Disassembly/Reassembly (panel removal, part storage, etc.).
- Electrical Component Disassembly/Reassembly (battery disconnection, connector removal, etc.)

**NOTES:**

Removed Parts: Inspect the vehicle for any damage. Place all removed parts on a protected surface in an area where they will not be damaged.

Connectors: When disconnecting connectors, do not pull on the wires; pull on the connectors.


**Vehicle Preparation and Protection CAUTION!**


Do not touch the positive terminal with any tool when removing battery cables. Be sure ignition key is in the OFF position during install. Do not disconnect ANY airbag connectors or indicators. Doing so may result in activating a diagnostic code. These codes will require the dealer to perform the reset procedure and may be charged a dealer fee. If you are unsure of any vehicle trim removal process consult the OEM service manual.

Removing vehicle trim panels in extreme hot and cold climate could result in some vehicle damage. Use care when removing all vehicle trim. Using tape on vehicle trim panels could help limit any scratches and/or marring. Use plastic trim panel removal tools whenever possible.


The instructions included in this kit are current at the time of printing. It is designed as a guide to help make the installation of this product successful. Always use caution and ask for assistance if you are not sure how to proceed. Voxx International is not responsible for any damage that may occur during installation or any changes to the vehicle interior.

**Wiring diagram:**

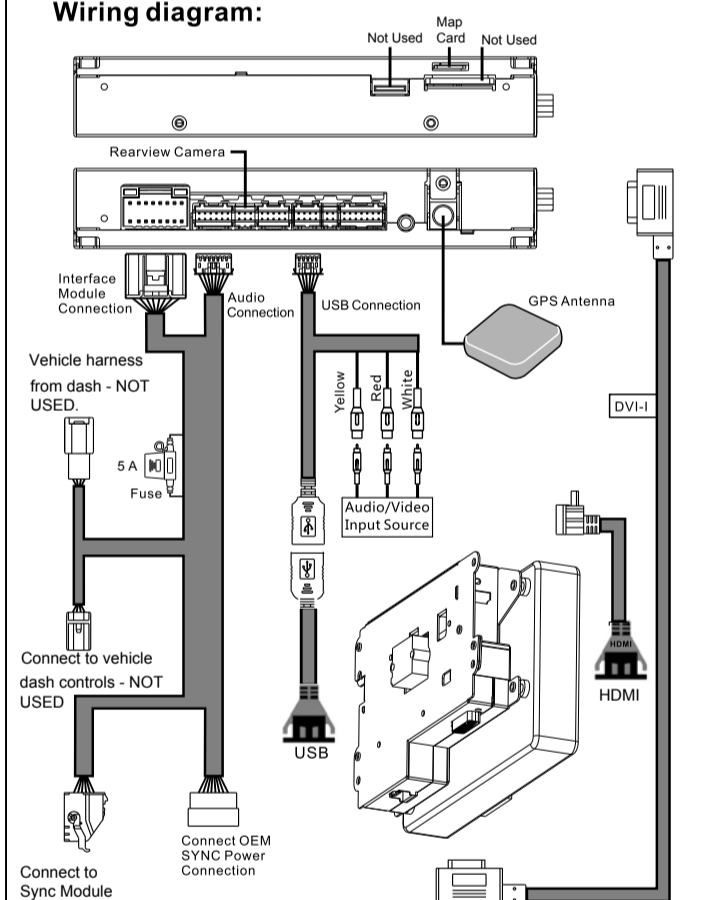


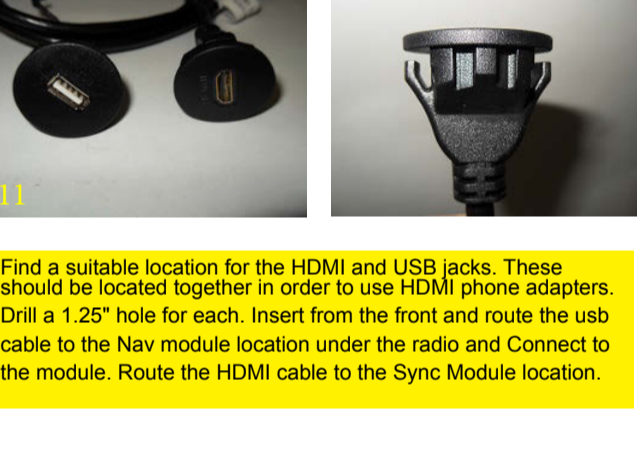


11 Find a suitable location for the HDMI and USB jacks. These should be located together in order to use HDMI phone adapters. Drill a 1.25" hole for each. Insert from the front and route the usb cable to the Nav module location under the radio and connect to the module. Route the HDMI cable to the Sync Module location.

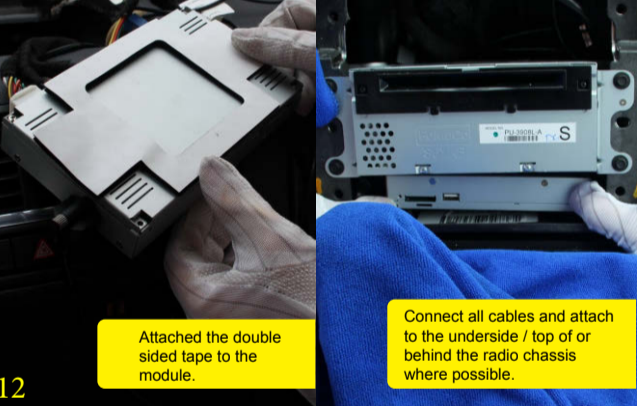

12 Attach the double sided tape to the module.

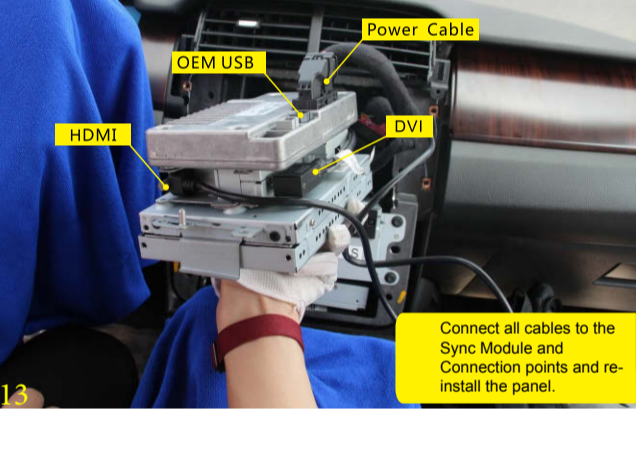

13 Connect all cables to the Sync Module and Connection points and re-install the panel.



14 Test the system and make all needed settings. Re-install all dash trim and you are finished.

**NOTE:** Due to dash configuration changes the Navigation mode can be switch in and out of by using the Steering wheel mounted Source button or when in Navigation select Exit > Minimize to return to the More menu or Sync.

The Radio mounted Media control will not exit navigation.

This page left intentionally blank

This page left intentionally blank

